



Part No: MR907762-1 [Dual VRD]

Dual Operator. Engine Driven with 3 Phase Power.





////Miller

GAME-CHANGING TECHNOLOGIES CAN STOP YOU FROM WASTING HOURS EVERY DAY.

ArcReach welding technology minimises the non-valueadded time spent walking to and from the power source and maximises arc-on time, weld quality and job site safety.



- HOBART

welding.com.au 1300 300 884

APPLICATIONS

Pipe Welding Maintenance & Repair Rigs Mechanical Contractor Construction Mining Maintenance Railroad Maintenance

PROCESSES

Stick (SMAW) MIG (GMAW) Flux-Cored (FCAW) RMD* Pulsed MIG* (GMAW-P) DC TIG (GTAW) Air Carbon Arc (CAC-A) (9.5mm)

*With optional ArcReach Smart Feeder.





Big Blue[®] 700X Duo Pro with ArcReach Technology

Part No: MR907762-1 [Dual VRD]

THE PROFESSIONAL WELDER'S CHOICE.

MORE POWER

700 Amps of weld power and 20,000 watts of continuous generator power.

MULTI-ARC WELDING

> One dependable engine - two independent arcs with up to 400 Amps each. Or plug in an additional inverter for a true multi operator work platform!

> Example: An additional XMT multi-process machine allows 3 operators, up to 200 Amps each. Premium quality arcs allow operators to work independently with no arc interaction. Multi operator welding has never been easier or more versatile.

AUTO REMOTE SENSE[™]

Standard 14-pin receptacle. For simple connection of remote controls and wire feeders

HD POWDER COAT

With zinc-rich primer protects sheet metal from rust and corrosion.

INCREASED EFFICIENCY

> More arcs and better fuel economy equal increased profits for your business.

> Estimated savings are 34 percent with a dual-operator unit versus two single operator units.

////Miller

DIGITAL METERS

SunVision technology enables welding parameters to be viewed with greater clarity than analogue meters at virtually any angle. Meters can be seen clearly even in direct sunlight.

INDUSTRIAL USB PORT

Quickly upload the latest software and download machine log files to retrieve in-depth information such as diagnostics and machine statistics.

AUXILIARY POWER*

- 20 kW 3 Phase: > 1 x 415-380 V
- 32 Amp Sockets
- > RCD Protected
- 4 kW 1 Phase:
- > 2 x 240 V 15 Amp Sockets.
- > RCD protected.

Plenty of Auxiliary power for operating onsite equipment at the job, or an extra welding machine e.g. XMT 350.

ARC CONTROL

Beneficial when welding with stick and solid wires for easier fine tuning of tough-to-weld materials and out-of-position applications.

MODEL OPTIONS & UPGRADE PACKAGES	PART NO
Standard Machine Package - Dual VRD	MR907762-1
Basic Upgrade Package - Dual VRD, Emergency Stop, Double Pole Battery Isolator & Lockout Device	MR907762-2
Full Upgrade Package - Dual VRD, Roll Frame & Spill Tray Assembly, Emergency Stop, Double Pole Battery Isolator & Lockout Device	MR907762-3

SIMPLE PARALLELING **SWITCH**

Makes switching from a single operator to dual operators a breeze. Weld up to 400 Amps per side when set up in dual-operator mode, or up to 700 Amps in single-operator mode.

HEAVY-DUTY LOW SPEED T4I INDUSTRIAL DIESEL ENGINES

STANDARD FEATURES

- > ArcReach.
- > Digital preset weld meters.
- > Automatic idle.
- > Vandalism lockout.

^{*}Generator auxiliary power is 60Hz, and intended for operating equipment associated with welding, such as angle grinders, drils and floodlights. Some Australian 50Hz equipment incorporating induction motors, such as pumps, fans, air compressors, refrigeration or air-conditioners, may not operate correctly and could be damaged. Refer to appliance supplier or manufacturer to confirm suitability.






Part No: MR907762-1 [Dual VRD]

ArcReach

REMOTE CONTROL OF THE POWER SOURCE WITHOUT A CONTROL CORD

ArcReach technology uses the existing weld cable to communicate welding control information between the feeder or remote and power source. This technology eliminates the need for control cords, and their associated problems and costs.

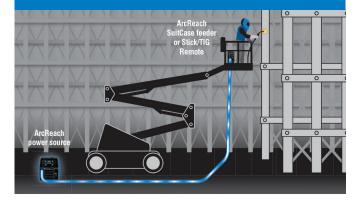

FEWER CABLES

SAVE TIME

Operators no longer need to troubleshoot welding system problems that result from damaged control cords.

ELIMINATE COSTLY CONTROL CORD REPAIRS

Because control cords are not used.

CROSS PLATFORM COMPATIBLE

The same ArcReach accessories that work on engine-driven equipment can also be used on select ArcReach-equipped XMT[®] and PipeWorx 350 FieldPro[™] power sources.

REVERSE COMPATIBLE

ArcReach-equipped power sources work with non-ArcReach accessories; however, the complete ArcReach benefit is only realised with the ArcReach system.

MORE WELDS IN LESS TIME

MORE ARC-ON TIME & REDUCED EXPOSURE TO WORKPLACE HAZARDS

Less time is spent going back to the welding power supply to set process and arc amperage or voltage.

AUTO-PROCESS SELECT™

Depending on connected accessory, the system automatically changes to stick or MIG/FCAW (with gas) if electrode positive polarity is detected or TIG or FCAW (no gas) if electrode negative polarity is detected, when ArcReach communication is established between the accessory and the Big Blue —reducing the need to access the power supply.

LESS OPERATOR FATIGUE

Operators no longer need to move or reposition heavy secondary weld leads bundled with control cords on the job site because control cables are not used.

AUTOMATIC RETURN TO PANEL SETTINGS

System automatically returns to Big Blue setting when ArcReach communication is terminated. For example, if the Big Blue is set to gouging at 500 Amps and an ArcReach feeder is connected, the Big Blue will go to a MIG/FCAW process. If the feeder is disconnected, the Big Blue will go back to its previous setting (gouging at 500 Amps).

BETTER WELDS WITH LESS REWORK

OPERATORS CAN PRECISELY SET ARC AMPERAGE OR VOLTAGE

Operators can set the Amperage and voltage at the weld joint and monitor the actual arc voltage and current delivered to the weld using the digital meters on the accessory. This removes guesswork when it comes to adhering to weld procedures.

REMOTE OVERRIDE OF BIG BLUE

When an ArcReach accessory is connected to a Big Blue the accessory has full control and the Big Blue controls are disabled. While under ArcReach control, process and voltage/ amperage adjustments are locked out, preventing accidental changes by personnel other than the welding operator.

Trusted by the best

Miller.

HOBARI welding.com.au 1300 300 884





Part No: MR907762-1 [Dual VRD]



ARCREACH SUITCASE 12 FEATURES

SETTING THE STANDARD FOR PERFORMANCE

Heavy-duty drive motor with tachometer control provides wire feed speed that is accurate and consistent from the start of the weld to the finish and from one weld to the next, which provides consistent arc quality. Front panel has trigger hold, wire jog, and gas purge for easy operator access. Wide voltage range for small and large wires with no contactor chatter or arc outages.

SET VOLTS & WIRE SPEED FEED REMOTELY

The simple interface on the feeder allows operators to adjust parameters at the point of use with no control cords.

EASY PROCESS CHANGEOVER

Simply connect the ArcReach SuitCase feeder to your weld lead and you are ready to go. The power source automatically switches settings to run conventional wire processes.

EASY SOLUTION FOR TRADITIONAL WIRE PROCESS

Add the flux-cored capability of the Big Blue 700X for fill and cap passes for increase productivity.

DURABLE DESIGN REDUCES DOWNTIME

Impact-resistant case and the elimination of feeder control cords provides a solid solution to last in harsh environments.



ARCREACH SMART FEEDER FEATURES

ARCREACH SMART FEEDER DELIVERS EXCELLENT RMD & PULSED MIG WELDING

Up to 60 metres away from the power source with no control cords - twice the distance previously possible. RMD and pulsed MIG processes also help reduce weld failures and eliminate backing gas on some stainless and chrome-moly applications.

EASY PROCESS CHANGEOVER

Simply connect the ArcReach Smart Feeder to your leads and you are ready to go. All controls automatically shift to the ArcReach Smart Feeder.

SYNERGIC PROCESSES

RMD and pulsed MIG welding permits procedures with one wire and one gas to eliminate process switch-over time.

DURABLE DESIGN REDUCES DOWNTIME

Impact-resistant case and the elimination of feeder control cords provides a solid solution to last in harsh environments.



ARCREACH STICK/TIG REMOTE

COMPLETE REMOTE CONTROL

Portable and lightweight, the ArcReach® Stick/TIG Remote paired with an Big Blue 700X power source allows you to change weld settings at your work area, saving a trip to the power supply. No extra control cord to purchase, maintain, string or unstring — saving time and money.







Part No: MR907762-1 [Dual VRD]

PRODUCT SPECIFICATIONS							
WELD. MODE	OUTPUT MODE	WELD OUTPUT RANGE	WELD OUTPUT RATED AT 40° C	MAX OPEN CIRCUIT VOLTAGE	GENERATOR POWER OUTPUT RATED AT 40° C***	DIM. (MM)	WEIGHT* (WITHOUT FUEL)
CC/DC (Stick/ TIG)	Separate (Dual Outputs)	20 - 400 A	300 A at 28 V 100% Duty Cycle 400 A at 36 V 40% Duty Cycle	85 VDC 30 VDC**	415-380V 60Hz 3 Phase 20,000 watts continuous (dependent of weld output) 240V 60Hz 1 Phase	D: 1654 75kg whe fuel tank	784kg Ship:
	Paralleled (Combined)	40 - 800 A	500 A at 34 V 100% Duty Cycle 700 A at 24 V 60% Duty Cycle				*Additional: 75kg when fuel tank
CV/DC (MIG/ FCAW)	Separate (Dual Outputs)	14 - 50 V	300 A at 28 V 100% Duty Cycle 400 A at 36 V 40% Duty Cycle		4,000 watts continuous (independent of weld output)		is full
	Paralleled (Combined)	14 - 50 V	500 A at 34 V 100% Duty Cycle 700 A at 24 V 60% Duty Cycle				

* Meets NEMA and IEC ratings. **VRD voltage for Stick & Sense voltage for Lift-Arc TIG. ***Will operate either 60Hz or 50/60Hz power tools, lights, etc.

ENGINE SPECIFICATIONS							
ENGINE BRAND	HP	ТҮРЕ	FEATURES	ENGINE SPEEDS	CAPACITIES	SOUND LEVELS AT 7 M	AUTOMATIC ENGINE SHUT DOWN
Deutz D2011L04i	48.6	Four Cylinder Industrial air/ oil cooled diesel	EPA Tier 4i compliant, includes oil pan and intake manifold heater	Idle: 1350 RPM Weld: 1800 RPM	Fuel: 95 L Oil: 10.4 L Coolant: Integrated Oil	Idle: 68.0 dB Weld: 74.7 dB	Low Oil Pressure, High Coolant Temperature, Low Fuel Level







Part No: MR907762-1 [Dual VRD]

	MATION - AVAILABLE BASE PACKAGES		
	LUX-CORED SYSTEM		
POWER SOURCE			
MR907762-1	Big Blue 700X Duo Pro with ArcReach Technology		
WIREFEEDER (ALT	ERNATIVE WIREFEEDERS LISTED BELOW)		
MR301456	ArcReach Suitcase 12		
REQUIRED ACCES	SORIES		
Interconnecting lea	ad kit for this option is not supplied by WIA		
BEQ4015AH8EMC	Bernard 440 Amp MIG gun with rotatable long 45 deg. neck, 4.6m cable, 1.2 tip		
HA801AR	Argon regulator & flow gauge		
MR190300	0.9 / 1.2 mm "V" groove roll kit for solid wires		
MR079607	1.2 mm knurled "V" groove roll kit for flux-cored wires		
MR079609	1.6 mm knurled "V" groove roll kit for flux-cored wires		
OPTION 2 - RMD P			
POWER SOURCE			
MR907762-1	Big Blue 700X Duo Pro with ArcReach Technology		
WIREFEEDER (ALT	ERNATIVE WIREFEEDERS LISTED BELOW)		
MR301177	FieldPro Smart Feeder (Dinse) CE		
REQUIRED ACCES	SORIES		
Interconnecting lea	ad kit (is not supplied by WIA) 2 X weld cable dinse to dinse & dinse work lead		
BEQ4010AR8EMC	Bernard 400 Amp MIG gun with fixed medium 45 deg. neck, 3.0m cable, 1.2 tip		
HA801AR	Argon regulator & flow gauge		
MR190300	0.9 / 1.2 mm "V" groove roll kit for solid wires		
MR079607	1.2 mm knurled "V" groove roll kit for flux-cored wires		
OPTION 3 - MIG/F	LUX-CORED SYSTEM		
POWER SOURCE			
MR907762-1	Big Blue 700X Duo Pro with ArcReach Technology		
WIREFEEDER (ALT	ERNATIVE WIREFEEDERS LISTED BELOW)		
MR301499	20 Series wirefeeder - standard		
REQUIRED ACCES	SORIES		
AM294-0/10	Interconnecting lead kit with earth leads - 10m dinse		
BEQ4015AH8EMC	Bernard 440 Amp MIG gun with rotatable long 45 deg. neck, 4.6m cable, 1.2 tip		
HA801AR	Argon regulator & flow gauge		
MR190300	0.9 / 1.2 mm "V" groove roll kit for solid wires		
OPTIONAL ACCES	SORIES		
MR242211020	RHC-14 remote hand current control		
MR300430	Wireless hand control & 14 pin receiver		
MR300429	Wireless foot control & 14 pin receiver		
MR301325	ArcReach Stick/TIG Remote		
BEQ4010AR8EMC	400 Amp MIG gun with fixed medium 45 deg neck 3.0m cable 1.2 tip		